

# 2.0-2.5 POWER RACK SYSTEM with INTEGRATED CONTROL VALVE


## Hose installation diagram

POWER STEERING FLUID: Howe Power Steering Fluid PN 1105  
(GM AC Delco PN: 19329448 may be substituted if needed)

**CAUTION:**  
**DO NOT USE ATF (AUTOMATIC TRANSMISSION FLUID)**

Use only Sta-Lube Marine grease p/n SI3120 (tube), SI3121 (tub)

NOTE: Hose lengths will vary with each installation, custom hoses must be fabricated.  
Hose kits are available separately.

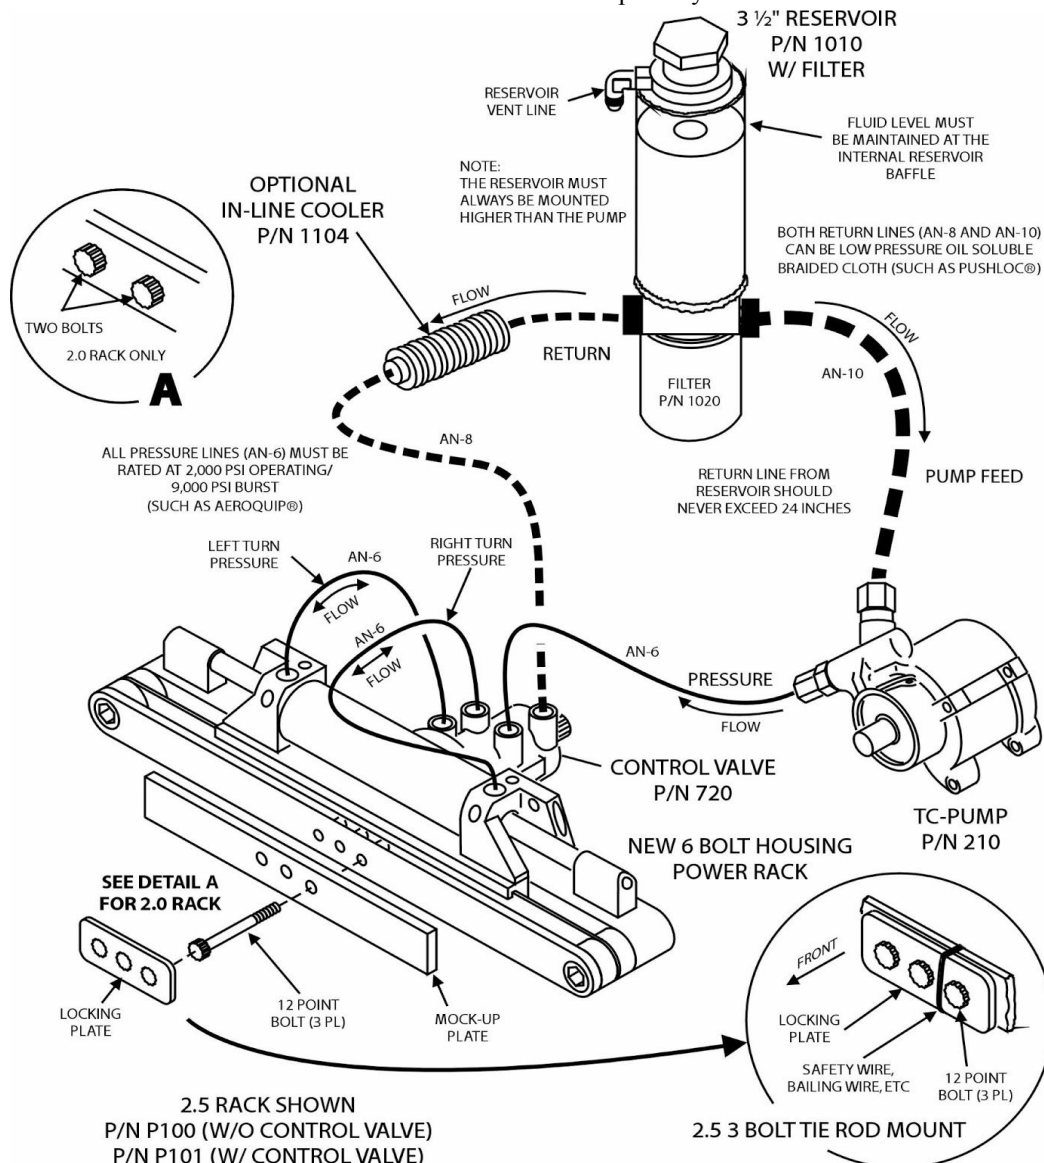

IF YOU HAVE ANY QUESTIONS ABOUT THE INSTALL CALL HOWE PERFORMANCE (619) 561-7764

7/21/2005 BASIC

### HOSE SPECIFICATIONS

- 8 Low Pressure Hose Specs: Hose I.D. .50", Hose O.D. .75", 250 PSI, 300 degrees Fahrenheit
- 10 Low Pressure Hose Specs: Hose I.D. .63", Hose O.D. .91", 250 PSI, 300 degrees Fahrenheit
- 6 High Pressure Hose Specs: Hose I.D. 5/16", Hose O.D. 43/64", 2,250 working PSI, 9,000 Burst PSI, 302 degrees Fahrenheit